
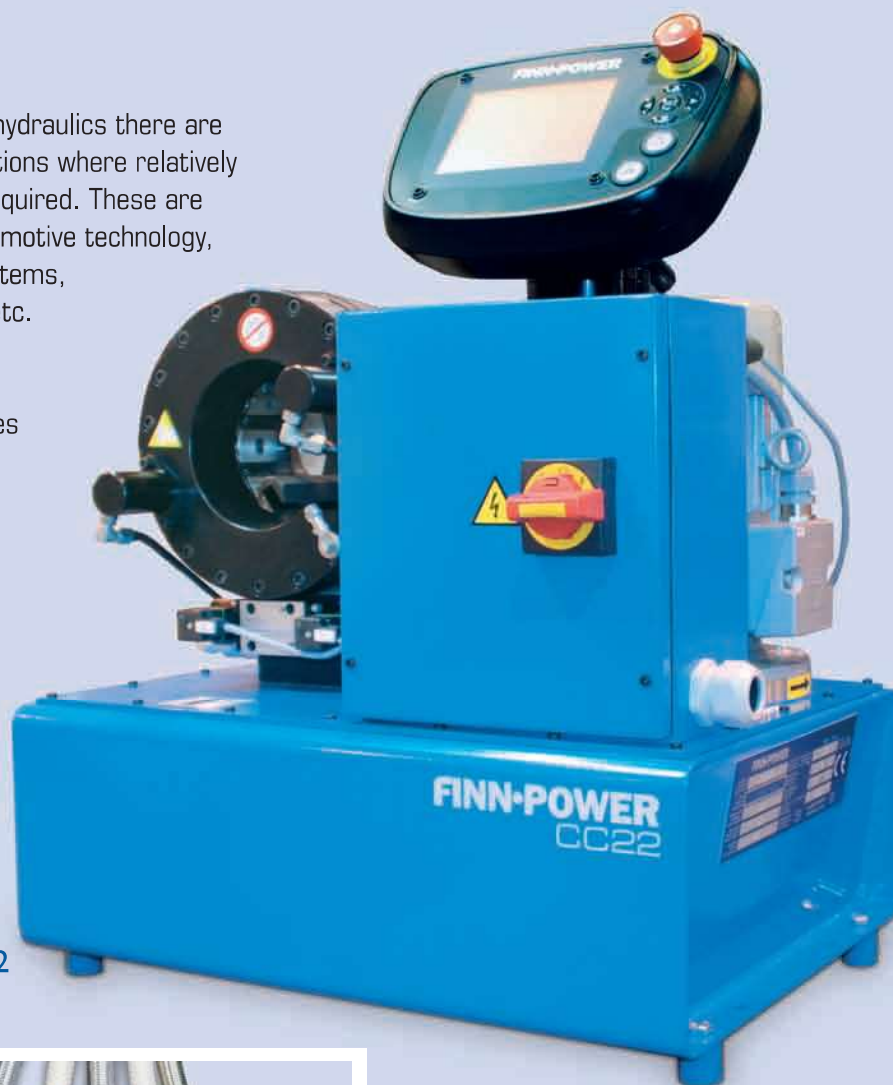


Outside high-pressure hydraulics there are numerous hose applications where relatively low crimping force is required. These are commonly found in automotive technology, low-pressure water systems, house-hold equipment etc.

Finn-Power's CC22 and CC24 crimping machines maximize productivity through an optimal force/speed ratio.

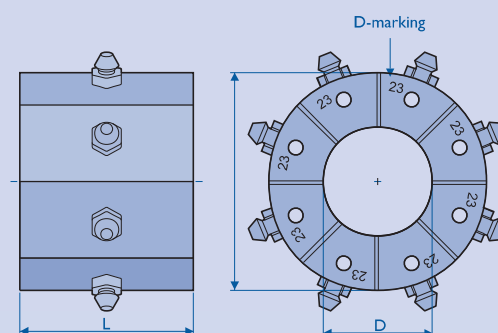

CC22

18315/xx
CC22

Pno	Crimping range	D	L
18315/10	10.0 - 12.0	10	50
18315/12	12.0 - 14.0	12	50
18315/14	14.0 - 16.0	14	50
18315/16	16.0 - 19.0	16	50
18315/19	19.0 - 23.0	19	50
18315/23	23.0 - 27.0	23	50
18315/27	27.0 - 31.0	27	50
18315/31	31.0 - 36.0	31	50
18315/36	36.0 - 41.0	36	50
18315/41	41.0 - 47.0	41	50
18315/47	47.0 - 54.0	47	50

18013 /xx
P20

Pno	Crimping range	D	L
18013/10	10.0 - 12.0	10	55
18013/12	12.0 - 14.0	12	55
18013/14	14.0 - 16.0	14	55
18013/16	16.0 - 19.0	16	55
18013/19	19.0 - 23.0	19	55
18013/23	23.0 - 27.0	23	55
18013/27	27.0 - 31.0	27	70
18013/31	31.0 - 36.0	31	70
18013/36	36.0 - 41.0	36	75
18013/41	41.0 - 47.0	41	75
18013/47	47.0 - 54.0	47	85
18013/54	54.0 - 61.0	54	85