


PAV1 (ISO 7241-A)




TECHNICAL INFORMATION
Materials: zinc-plated and yellow bichromated steel, with all high stressed components carbonitrided or hardened by induction. **Seals:** standard nitrile NBR. On request EPDM, FPM (Viton™) and CR (Neoprene) seals. **Working temperature:** with standard seals -25°C +125°C. **Back-up ring:** in pure Teflon.

技术信息
材料: 高阻钢与高压硬化的组件。弹簧为C98钢或AISI302不锈钢。表面加工: 镀白锌。密封圈: 丁腈橡胶NBR。可依客户要求改为EPDM和FPM。工作温度: -25°C+125°C。支撑圈: 特设纯铁氟龙。互换性: ISO 7241-A

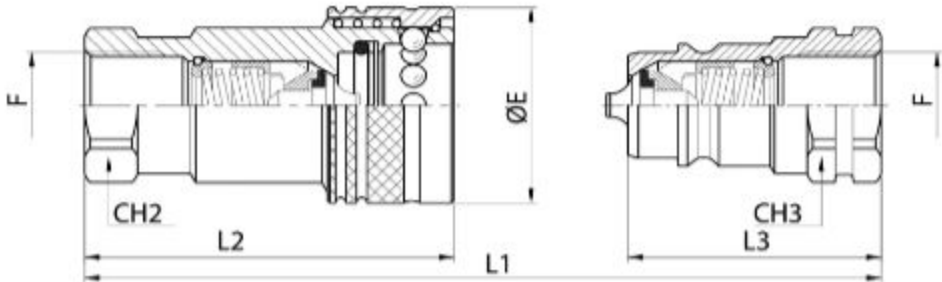

DN/P	BG	USA	ISO	CH2	CH3	øE	L1	L2	L3	F	COD. (F)	COD. (M)
06	1	04	6.3	19	19	26	70	49	35	G 1/4 1/4 NPT RC 1/4	PAV1.0606.002 PAV1.0606.012 PAV1.0606.042	PAV1.0606.003 PAV1.0606.013 PAV1.0606.043
10	2	06	10	22	22	30	85	60.5	42.5	G 3/8 3/8 NPT RC 3/8	PAV1.1010.002 PAV1.1010.012 PAV1.1010.042	PAV1.1010.003 PAV1.1010.013 PAV1.1010.043
13	3	08	12.5	27	27	38	96	70	48	G 1/2 1/2 NPT RC 1/2 M 22x1.5 3/4 UNF	PAV1.1313.002 PAV1.1313.012 PAV1.1313.042 PAV1.1322.102 PAV1.1319.032	PAV1.1313.003 PAV1.1313.013 PAV1.1313.043 PAV1.1322.103 PAV1.1319.033
20	4	12	20	34	34	45	114	84.5	57	G 3/4 3/4 NPT RC 3/4	PAV1.2019.002 PAV1.2019.012 PAV1.2019.042	PAV1.2019.003 PAV1.2019.013 PAV1.2019.043
25	5	16	25	41	41	52	131	99	65.5	G 1 1 NPT RC 1	PAV1.2525.002 PAV1.2525.012 PAV1.2525.042	PAV1.2525.003 PAV1.2525.013 PAV1.2525.043
30	6	20	31.5	50	50	70	150	117	75	G 1 1/4 1 1/4 NPT RC 1 1/4	PAV1.3031.002 PAV1.3031.012 PAV1.3031.042	PAV1.3031.003 PAV1.3031.013 PAV1.3031.043
39	7	24	40	60	60	82	167	133	84	G 1 1/2 1 1/2 NPT RC 1 1/2	PAV1.3939.002 PAV1.3939.012 PAV1.3939.042	PAV1.3939.003 PAV1.3939.013 PAV1.3939.043
50	8	32	50	75	75	99	216	169	108	G 2 2 NPT RC 2	PAV1.5051.002 PAV1.5051.012 PAV1.5051.042	PAV1.5051.003 PAV1.5051.013 PAV1.5051.043

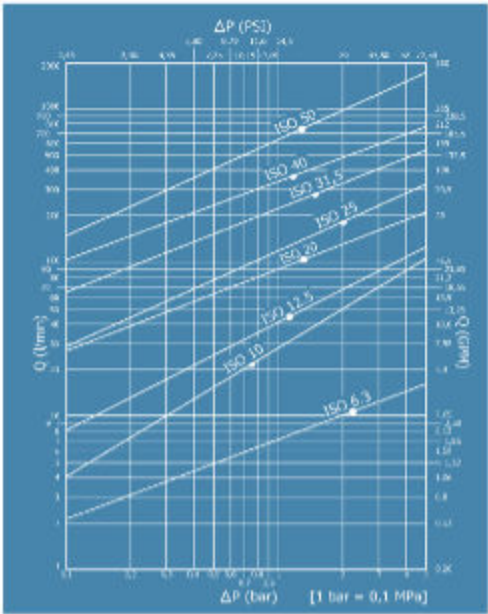

流量图

技术参数

规格	最大工作压力	流量	最小爆破压力			液体溢出量
			公头	母头	接口	
DN/P BG USA ISO	DN (mm) (bar)	(l/min)	(bar)	(bar)	(bar)	(cc)
06 1 04 6.3	5 350	12-24	1510	1760	1450	0.5
10 2 06 10	9 350	23-48	1470	1520	1590	1.9
13 3 08 12.5	10.6 250	45-90	1000	1460	1240	2.7
20 4 12 20	15.7 250	106-200	900	1530	1040	9.3
25 5 16 25	17.3 200	189-260	1300	960	1300	16
30 6 20 31.5	22.8 200	288-480	1140	850	1090	30
39 7 24 40	30 190	379-757	810	790	820	54
50 8 32 50	37.6 160	757-1000	650	960	1100	120

塑料



规格	ISO	型号(母头)	重量(g)	包装(pcs)	规格(公头)	重量(g)	包装(pcs)	颜色	材料
06	1	6.3 SPAV.06002	4	200	SPAV.06003	4	150	红	聚乙烯
10	2	10 SPAV.10002	14	100	SPAV.10003	16	100	红	PVC
13	3	12.5 SPAV.13002	20	50	SPAV.13003	21	50	红	PVC
13	3	12.5 SPAV.13012	20	50	SPAV.13013	21	50	黄	PVC
13	3	12.5 SPAV.13022	20	50	SPAV.13023	21	50	绿	PVC
13	3	12.5 SPAV.13032	20	50	SPAV.13033	21	50	蓝	PVC
13	3	12.5 SPAV.13042	20	50	SPAV.13043	21	50	紫	PVC
13	3	12.5 SPAV.13052	20	50	SPAV.13053	21	50	白	PVC
20	4	19 SPAV.20002	33	50	SPAV.20003	39	25	红	PVC
25	5	25 SPAV.25002	16	50	SPAV.25003	19	25	红	聚乙烯