


型号-Code: CURVC42

C42电控液压弯管机，操作简单，能加工外径6-42mm，最大壁厚4mm，材质从不锈钢(AISI316Ti)至碳钢(ST37.4)的钢管；配备电子限位开关可适合批量加工。

This device which is easy to use and maintain is the best for bending 6 to 42 mm diameter and 4 mm maximum thickness rigid stainless steel (AISI 316 Ti) and carbon steel (ST 37.4) tubes. Also suitable for volume production.

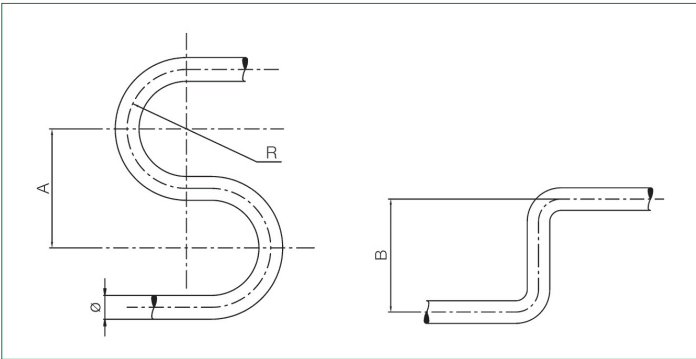

技术参数 - TECHNICAL DATA	
弯管 - BENDING	6-42x4 mm (0.236"-1.654"x0.158")
材质 - MATERIALS	AISI 316 Ti - ST 37.4
尺寸 长x宽x高 - DIMENSIONS LxWxH	680x880x 910 mm (26.772"x34.646"x35.827")
重量 (含油) - WEIGHT WITH OIL	102 Kg (225 Lbs)
标准电压 - STANDARD VOLTAGE	400V 50HZ 3PH
电机功率 - MOTOR POWER	1.1 Kw (1.5 Hp)

最大壁厚 - MAX THICKNESS	
4 mm	Ø 38
4 mm	Ø 42

包含附件 - INCLUDED ACCESSORIES	
电动控制手柄 CONTROL BOARD	
电子限位开关 BACK ELECTRIC LIMIT SWITCH	
液压油 OIL	

可选择 - OPTIONAL	
特殊电压 SPECIAL VOLTAGE	

Ø	6	8	10	12	14	15	16	18	20	22	25	28	30	32	35	38	42	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"
弯曲半径 MEDIUM BENDING RADIUS	15	16.5	27.5	32.7	46	46	48	48	66	66	81.5	81	98.5	101	125.5	116	126	27.5	46	48	66	81	125.5	126
最大弯曲角度 MAX BENDING ANGLE	170°	170°	170°	170°	170°	170°	170°	170°	160°	160°	160°	160°	150°	150°	120°	120°	120°	170°	170°	170°	160°	160°	120°	120°
A (mm)	60	60	70	80	110	110	110	110	140	140	170	180	220	220	250	250	250	70	110	110	140	180	250	250
B (mm)	70	70	115	120	180	180	180	190	230	240	270	300	300	300	440	440	440	115	180	180	240	300	440	440