


CF — 公制24°锥带O型圈-轻系列-旋转螺母-90°弯接头

ISO 12151-2-SWE-L, DKOL 90°

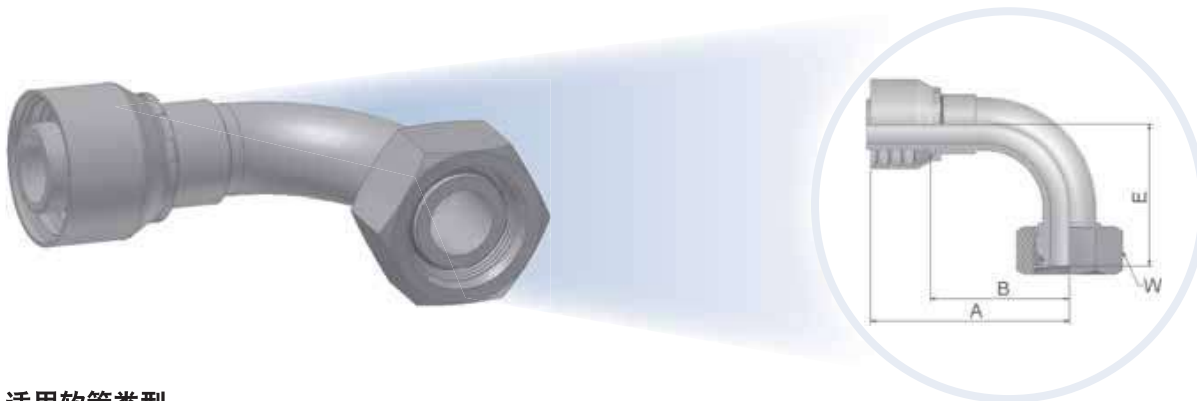

适用软管类型:

46	441, 461LT, 462, 462ST, 463, 492, 492ST, 692, 692 TWIN
43	381, 301SN, 302, 481, 421SN, 422, 426, 436, 441, 451TC, 471TC /472TC, 493, 811, 881

XXXX-XX-XX 型号 46 43		软管内径 DN Inch Size mm				螺纹 公制	钢管 外径 mm	A mm	B mm	E mm	W mm
1CF46-6-4	1CF43-6-4	6	1/4	-4	6,3	M12x1,5	6	57	33	33	14
1CF46-8-4	1CF43-8-4	6	1/4	-4	6,3	M14x1,5	8	51	28	29	17
1CF46-10-4	1CF43-10-4	6	1/4	-4	6,3	M16x1,5	10	50	26	29	19
1CF46-12-4	1CF43-12-4	6	1/4	-4	6,3	M18x1,5	12	50	26	29	22
1CF46-8-5	1CF43-8-5	8	5/16	-5	7,9	M14x1,5	8	63	39	34	17
1CF46-10-5	1CF43-10-5	8	5/16	-5	7,9	M16x1,5	10	61	37	29	19
1CF46-12-5	1CF43-12-5	8	5/16	-5	7,9	M18x1,5	12	61	37	30	22
1CF46-10-6	1CF43-10-6	10	3/8	-6	9,5	M16x1,5	10	60	37	37	19
1CF46-12-6	1CF43-12-6	10	3/8	-6	9,5	M18x1,5	12	58	35	36	22
1CF46-15-6	1CF43-15-6	10	3/8	-6	9,5	M22x1,5	15	58	35	36	27
1CF46-18-6	1CF43-18-6	10	3/8	-6	9,5	M26x1,5	18	63	40	38	32
1CF46-12-8	1CF43-12-8	12	1/2	-8	12,7	M18x1,5	12	63	39	45	22
1CF46-15-8	1CF43-15-8	12	1/2	-8	12,7	M22x1,5	15	61	37	43	27
1CF46-18-8	1CF43-18-8	12	1/2	-8	12,7	M26x1,5	18	65	41	43	32
1CF46-15-10	1CF43-15-10	16	5/8	-10	15,9	M22x1,5	15	66	41	50	27
1CF46-18-10	1CF43-18-10	16	5/8	-10	15,9	M26x1,5	18	66	41	45	32
1CF46-22-10	1CF43-22-10	16	5/8	-10	15,9	M30x2	22	71	46	47	36
1CF46-18-12	1CF43-18-12	20	3/4	-12	19,1	M26x1,5	18	80	54	56	32
1CF46-22-12	1CF43-22-12	20	3/4	-12	19,1	M30x2	22	80	54	55	36
1CF46-28-12	1CF43-28-12	20	3/4	-12	19,1	M36x2	28	76	50	57	41
1CF46-22-16	1CF43-22-16	25	1	-16	25,4	M30x2	22	102	72	74	36
1CF46-28-16	1CF43-28-16	25	1	-16	25,4	M36x2	28	100	70	71	41
	1CF43-22-20	32	1-1/4	-20	31,8	M30x2	22	130	83	81	36
	1CF43-28-20	32	1-1/4	-20	31,8	M36x2	28	130	83	81	41
1CF46-35-20		32	1-1/4	-20	31,8	M45x2	35	124	87	79	50
	1CF43-35-20	32	1-1/4	-20	31,8	M45x2	35	130	83	79	50
	1CF43-42-24	40	1-1/2	-24	38,1	M52x2	42	139	101	101	60
	1CF43-42-24C	40	1-1/2	-24	38,1	M52x2	42	138	101	101	60

正常订货情况下配丁晴橡胶O型圈的接头可在-30°C~+105°C温度下正常使用, 如有需要, 可订购其他特殊材料的O型圈。
O型圈的尺寸和型号请参考样本E栏中O型圈部分。

材料: 碳钢, 镀锌
C: 不锈钢